

Chiller



Customized Chiller

AAROHI
Chiller






Vacuum Pump

OIL Sealed Rotary Vane Vacuum Pump

VACUUM PUMP

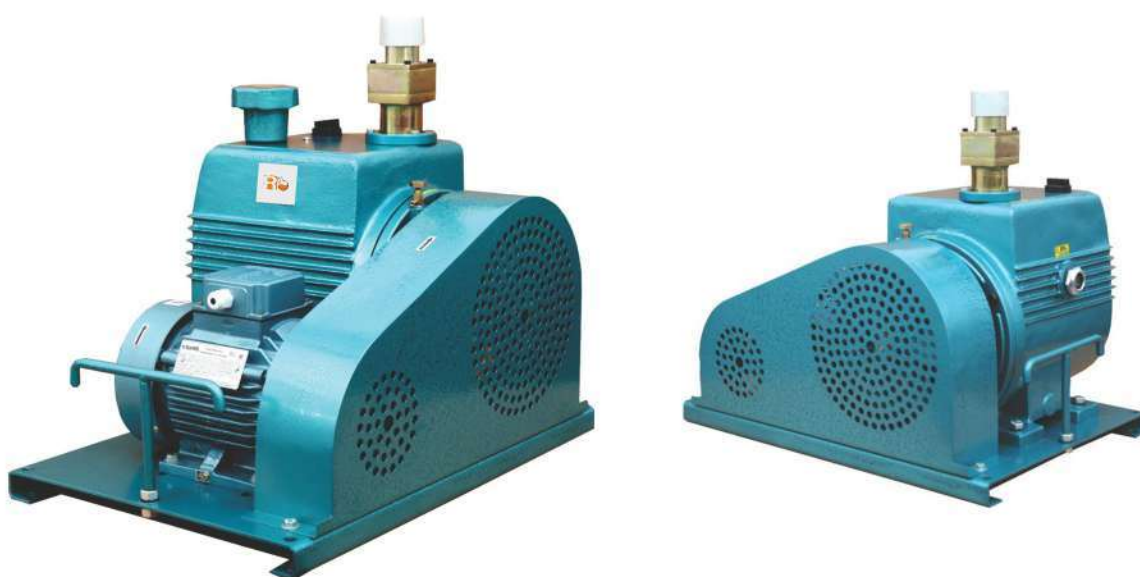


Model	Unit	SVT180	SVT 300	SVT 600	SVT1000
Displacement 50 Hz	L/min	180	300	600	1000
Ultimate Pressure	with Gas Ballast *	torr	$< 1 \times 10^{-2}$		
	Without Gas Ballast*	torr	$< 1 \times 10^{-3}$		
Inlet Port	mm	Ø 32	Ø 32	Ø 46	Ø 50
Exhaust Port	--	PF 1"	PF 1"	PF 1 ½"	BSP 1 ½"
Motor Power 3Ø	kW	0.4	0.75	0.75	1.5
Rotational Speed	RPM	600			
Oil Capacity	Liter	2	2.5	4	6.5
Weight Including Motor	kg	55	65	85	140

Vacuum Pump



OIL Sealed Rotary Vane Vacuum Pump

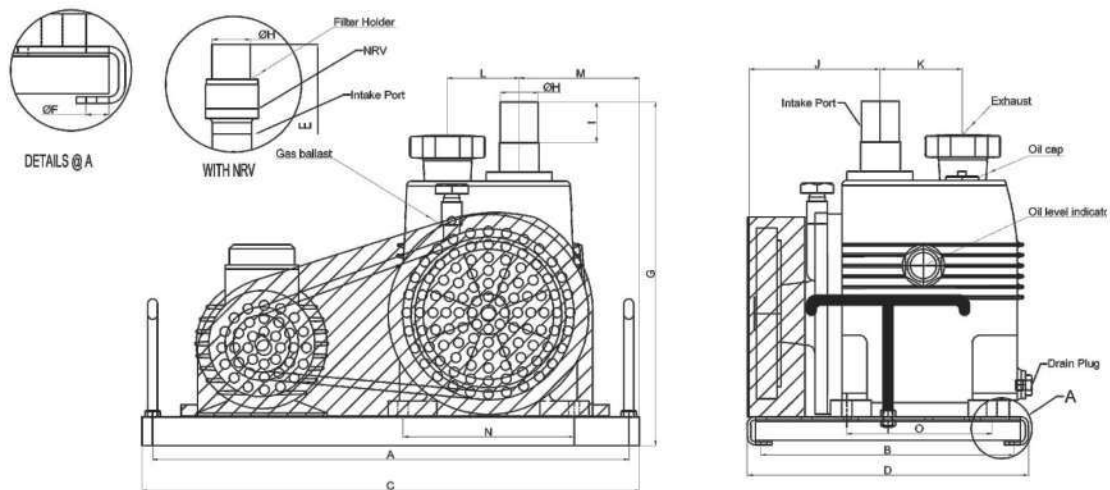

MEASUREMENTS															
SERIES	A	B	C	D	E	ØF	G	ØH	I	J	K	L	M	N	O
SVT 180	455	255	485	285	346	14	363	32	90	120	90	59	112	170	140
SVT 300	515	280	545	310	394	14	343	32	27	146	100	70	125	160	150
SVT 600	584	310	610	345	446	14	422	46	50	175	110	85	147	210	178
SVT1000	610	385	640	425	524	14	503	50	50	190	140	103	167	248	165

- Two stage high vacuum pump.
- Capacity 180 to 1000 LPM.
- Ultimate Vacuum $<1 \times 10^{-3}$ Torr